

**Cor-2000 System**



# Cor-2000 System

## Transmittance

Uw from 1,8 (W/m²K)

Please consult typology, dimensions and glass

## Acoustic insulation

Maximum glazing: 30 mm.

Maximum acoustic insulation **Rw=39 dBA**

## Finishes

Colour powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

## Categories achieved at test centre

Air permeability  
(EN 12207:2000): Class 4

Water tightness  
(EN 12208:2000): Class 9A

Wind resistance  
(EN 12210:2000): Class C5  
Reference test 1,20 x 1,18 m. 2 sashes

Possibility of straight or curved sashes and beads



Possibility of incorporating hardware with concealed hinges.

Possibility of incorporating security hardware - Evo Security.




Sections <http://box.cortizo.com/ficheros/compartir/Y29ydGI6b19jYXJwZXRhc2g5MQ> Profile thickness  
Frame 45 mm. Window 1,5 mm.  
Sash 53 mm. Door 1,7 mm

Possibility of straight or curved beads

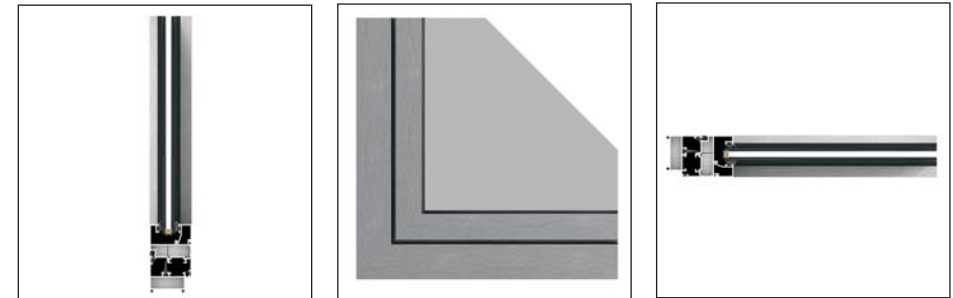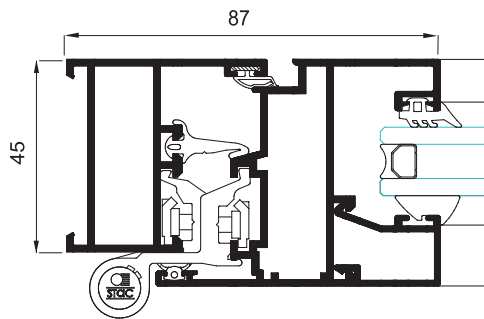

## Opening possibilities

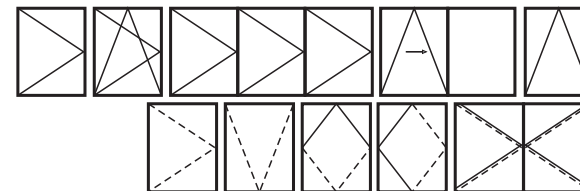

**Open in:** practicable, turn-tilt, folding, parallel tilt, hinged.

**Open out:** practicable, projecting-sliding, pivoting on horizontal or vertical axis, swing opening

## Maximum dimensions/sash

Width (L) = 1.500 mm.  
Height (H) = 2.400 mm.

Please consult regarding maximum weight and dimensions according to types

## Maximum weight/sash

120 Kg.