

Equity Façade

A light curtain walling system with thermal insulation.

With a seen internal section of only 18 mm, both in the mullion as well as the transom, this new façade system presents a minimalist style and slenderness allowing a total entry of light to the interior of the building.

The mullion and transom profiles equalize its depth giving rise to a flush assembly that provides uniformity to the internal style of the façade.

The glazing is achieved by fixing the glass using aluminium pressure covers, both in vertical as in horizontal, in such a way that the external view is 52 mm and internally is only 18 mm.



Equity Façade

Transmittance

Ucw from 0.6 (W/m²K)

Please consult dimensions and glass

Glazing

Recommended glazing is an externally tempered pane.
Maximum recommended glazing is 40 mm

Finishes

Colour powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized



Internal seen section

Profile thickness


Mullion 18 mm.

2,6 mm.

Transom 18 mm.

2,6 mm.


Thermal breaking 24 mm.

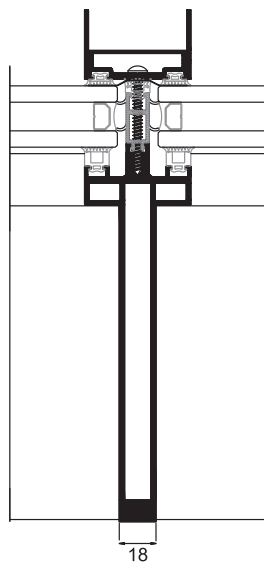


Covers

H shape cover, 34 mm deep.

Rectangular cover: 14, 19 & 100 mm deep

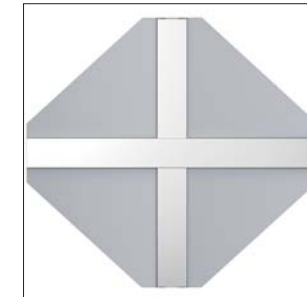

Opening possibilities



Projecting

Maximum dimensions

Projecting opening

Max. Width (L) = 2.200 mm.

Max. Height(H) = 2.200 mm.

Maximum weight

Projecting opening 140 Kg.

Fixed light 400 Kg.